




The compact hydraulic unit is integrated into the machine frame and offers maximum power in the smallest of spaces

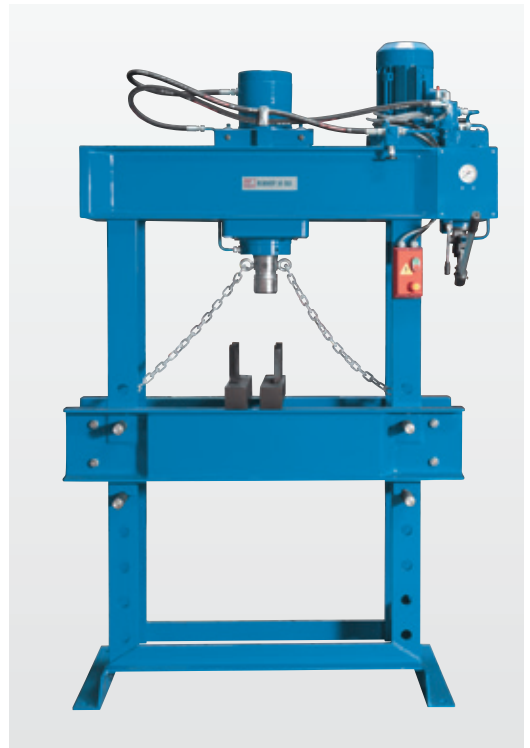

These universal presses are indispensable in technical workshops and maintenance departments

- Torsionally rigid welded gantry-style frame made of thick-walled sectional steel
- Heavy-duty design, intended for professional use
- Versatile for many kinds of repair and assembly work
- Finely adjustable press force for trueing axles, supports, shafts, and much more
- Long piston stroke for removing and press-fitting bearings and bushings
- The operator can see the current working pressure on the gauge at all times.
- Motorised hydraulic unit enables efficient work
- Work cylinder with smooth horizontal adjustment for easier setup
- Premium components for guaranteed long-lasting reliable operation

Standard Equipment

Movable working cylinder, Height adjustable work table, V-block set, manometer, operator manual

Specifications		60	80	100	120	160	160 L	180	200
Working area									
Working width	mm	830	930	1.020	1.020	1.100	1.550	1.550	1.550
Frame through-hole	mm	300	300	300	350	350	550	550	550
Pressure force	t	60	80	100	120	160	160	180	200
Operating pressure (max.)	bar	400	400	400	400	400	400	400	400
Stroke	mm	400	400	400	400	400	400	400	400
Forward motion speed	mm/s	6,1	5,4	7,12	5,8	6,2	6,2	8	6,4
Press speed	mm/s	6,1	5,4	7,12	5,8	6,2	6,2	8	6,4
Return speed	mm/s	10	8,3	13,42	9,5	9,8	9,8	13,3	11,04
Drive capacity									
Motor rating hydraulic pump	kW	3	3	4	7,5	5,5	5,5	7,5	7,5
Measures and weights									
Hydraulic tank volume	l	6	6	11	11	15	15	22	22
Weight	kg	700	725	2.450	1.250	1.300	1.750	2.100	2.600
Overall dimensions (length x width x height)	mm	1.460x850 x2.400	1.560x850 x2.400	1.600x850 x2.450	1.600x950 x2.450	1.640x950 x2.550	2.230x1.200 x2.850	2.230x1.200 x2.850	2.230x1.200 x2.850
Part No.		131770	131771	131772	131773	131774	131775	131776	131777